



WPCK61 General Type Isolation-Film Pressure Transmitter

User's Manual
(Version: 3.0)

Zhengzhou Winsen Electronics Technology CO., LTD

Statement

This manual's copyright belongs to Zhengzhou Winsen Electronics Technology Co., LTD. Without the written permission, any part of this manual shall not be copied, translated, stored in database or retrieval system, also can't spread through electronic, copying, record ways.

Thanks for purchasing our products. In order to have customers use it better and reduce the faults caused by misuse, please read the manual carefully and operate it correctly in accordance with the instructions. If users disobey the terms or remove, disassemble, change the components inside of the sensor, we shall not be responsible for the loss.

The specific such as color, appearance, sizes &etc., please in kind prevail.

We are devoting ourselves to products development and technical innovation, so we reserve the right to improve the products without notice. Please confirm it is the valid version before using this manual. At the same time, users' comments on optimized using way are welcome.

Please keep the manual properly, in case you need help during the usage in the future.

Zhengzhou Winsen Electronics Technology CO., LTD.

WPCK61 General Type Isolation-Film Pressure Transmitter

Product

WPCK61 Isolation-Film Pressure Transmitter is a wide-used pressure measurement products. Adopting high-precision pressure-sensitive film and signal processing unit, and special design of anti-over-voltage, impact resistance, anti-ice blocking, and anti-electromagnetic interference, it can be long-term reliable used in a variety of harsh Workplace or environmental. The products also meet explosion-proof and marine products related to the design requirements.

Main features :

- Anti-pressure impact, anti-water hammer effect
- Anti-ice blocking effect
- PCB buffer, vibration resistance
- Anti-electromagnetic interference
- Anti-power supply voltage fluctuation
- Anti-power supply fault connection



Application:


- Petrochemical
- Marine, mechanical hydraulic system
- Hydropower and window power
- Water conservancy and pump use
- Equipment support

Main technical parameters

Measuring Range	-0.1—0~0.01—250MPa	
Overload	2 times (below 70MPa)	
	1.5 times (over 100MPa)	
Pressure Type	S	A
Power Supply	8-30VDC	8-30VDC
Output Signal	4-20mADC	0/1-5/10VDC
Transition Method	Two Lines	Three Lines
Load Resistance	$\leq (U-8)/0.02\Omega$	> 100K
Protection Class	IP65(Connector Type) /IP68(Fully Sealed Cable Type)	
Shell	Stainless Steel 304	
Film	Stainless Steel 316L	
Seals	Fluoro-rubber	
Accuracy	$\pm 0.25\%FS$ (typical)	$\pm 0.5\%FS$ (max)
Medium Working Temperature	-35℃~ +85℃	

Environment Temperature	-40°C~ +65°C	
Storage Temperature	-40°C~ +105°C	
Zero Point Temperature Ratio	$\pm 0.03\%FS/^{\circ}C$ ($\leq 100kPa$)	$\pm 0.02\%FS/^{\circ}C$ ($> 100kPa$)
Full Temperature Ratio	$\pm 0.03\%FS/^{\circ}C$ ($\leq 100kPa$)	$\pm 0.02\%FS/^{\circ}C$ ($> 100kPa$)
Long-term Stability	$\pm 0.1\%FS/year$ (typical)	$\pm 0.2\%FS/year$ (max)
Note: Accuracy includes non-linear, repeatability, pressure hysteresis indicators, and calibrate on 0.01%FS accuracy pressure measurement equipment, in accordance with the relevant national standards.		


Structure

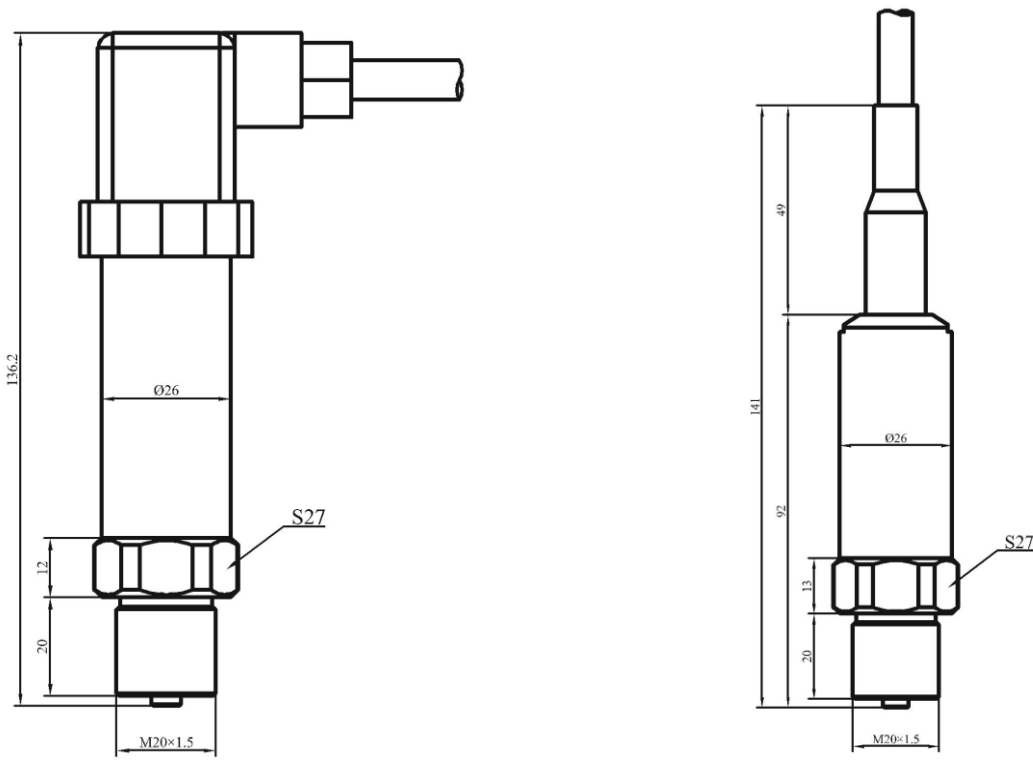

Electrical Connection


Connector Connection Pin definition

Pin	Two Line	Three Line
1	Power Supply Positive(+V)	Power Supply Positive(+V)
2	Power Supply Negative(0V/+OUT)	Common Terminal (GND)
3	Empty	Output Positive(+ OUT)

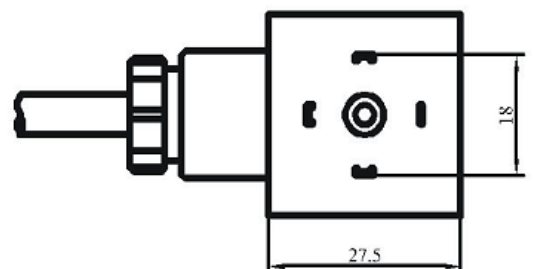


Cable Connection Wiring Definition


Wire Color	Two Line	Three Line
Black	Power Supply Positive(+V)	Power Supply Positive(+V)
White	Power Supply Negative(0V/+OUT)	Output Positive(+ OUT)
Red	Empty	Common Terminal (GND)

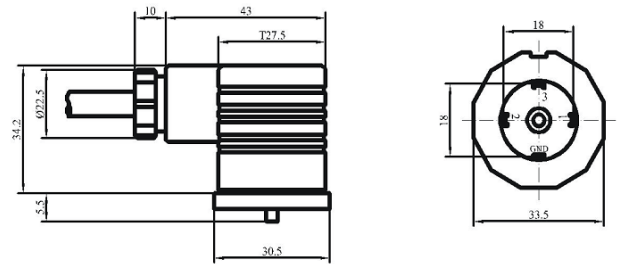

Two Line Type 4~20ma DC Output transmitter Electrical Connection

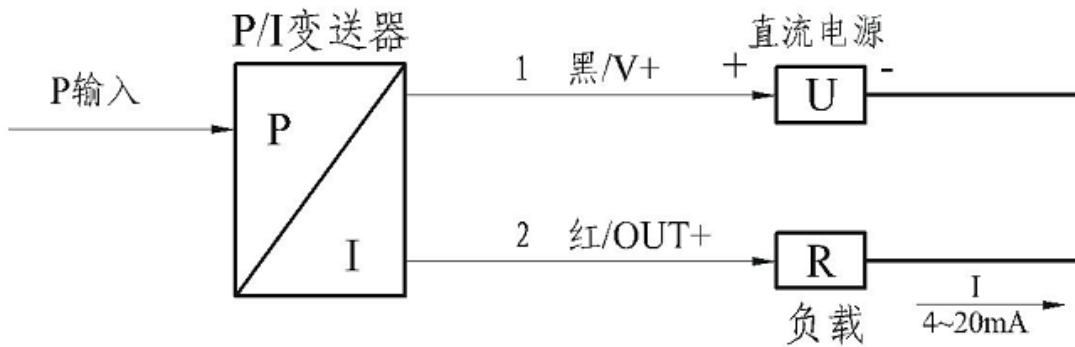

Three Line Type 0/1~5VDC Output transmitter Electrical Connection

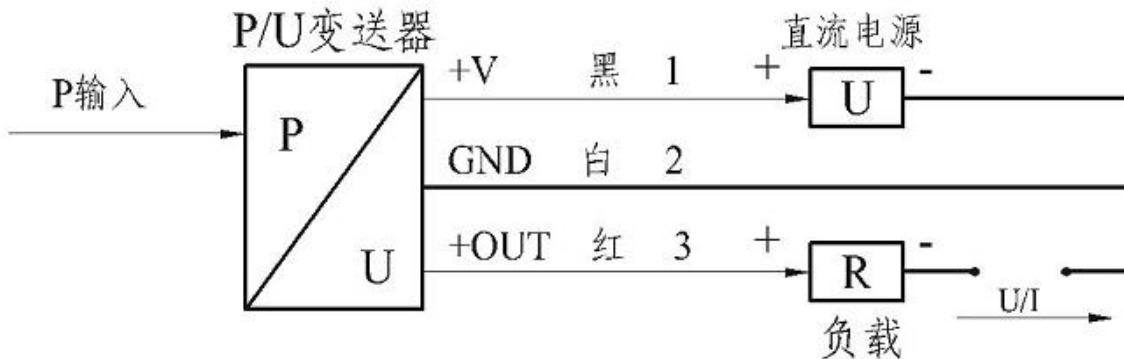

Zhengzhou Winsen Electronics Technology Co., Ltd
Add: No.299, Jinsuo Road, National Hi-Tech Zone, Zhengzhou 450001 China
Tel: +86-371-67169097/67169670
Fax: +86-371-60932988
E-mail: sales@winsensor.com
Website: www.winsen-sensor.com