



Laser Dust Sensor

(Model: ZH08)

Manual

Version: 1.0

Issue Date: 2018-07-04

Zhengzhou Winsen Electronics Technology Co., Ltd

Statement

This manual copyright belongs to Zhengzhou Winsen Electronics Technology Co., LTD. Without the written permission, any part of this manual shall not be copied, translated, stored in database or retrieval system, also can't spread through electronic, copying, record ways.

Thanks for purchasing our product. In order to let customers using it better and reduce the faults caused by misuse, please read the manual carefully and operate it correctly in accordance with the instructions. If users disobey the terms or remove, disassemble, change the components inside of the sensor, we shall not be responsible for the loss.

The specific such as color, appearance, sizes & etc., please in kind prevail.


We are devoting ourselves to products development and technical innovation, so we reserve the right to improve the products without notice. Please confirm it is the valid version before using this manual. At the same time, users' comments on optimized using way are welcome.

Please keep the manual properly, in order to get help if you have questions during the usage in the future.

ZH08 Laser dust sensor

Description:

Laser Dust sensor module is a common type, small size sensor, using laser scattering principle to detect the dust particles in air, with good consistency and stability. It is easy to use, with UART & PWM output; Small size is suitable for integrating.

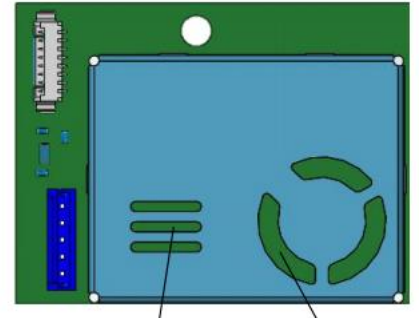

Dust Collecting Hole
(Inlet)

Outlet

Features:

Good consistency
Real time response
Accurate data
Low power consumption
Minus resolution of particle diameter
is 0.3 μm

Main Applications:

Air purifiers
Ventilation systems
Portable instrument
Air quality monitoring equipment
Air conditioner
Smart home fields

Technical parameters:

Model	ZH08
Types of Detection	PM1.0, PM2.5, PM10
Preheating Time	30
Output	UART_TTL Output (3.3V level)
	PWM Output (3.3V level)
Working Voltage	4.9V ~ 5.5V(DC)
Working Current	< 120mA
Dormancy Current	< 20mA
Response Time	T90 < 45s
Working Humidity	0 ~ 80%RH(No Condensation)
Working Tem	- 10 ~ 50°C
Storage Tem	- 30 ~ 70°C
Dimension	58.5×44.5×14.8mm(L×W×H)

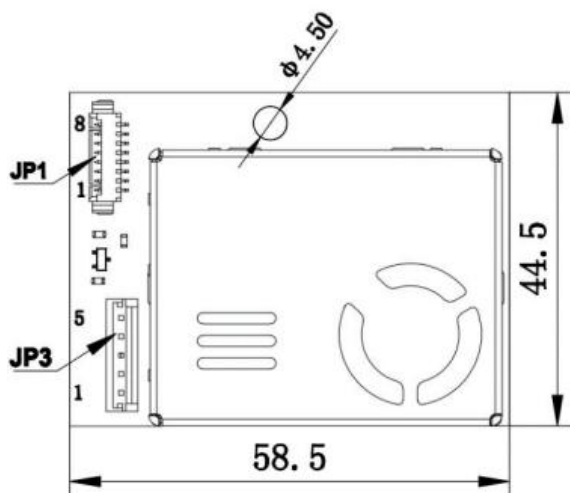


Fig1.

JP1 Line Sequence Definition			JP3 Line Sequence Definition		
Specification: MOLEX-1.25*8			Specification: JST-EH2.54		
Pin	Definition	Parameters	Pin	Definition	Parameters
1	VDD	4.9-5.5V	1	GND	
2	GND		2	TXD	TTL@3.3V
3	Reserve		3	VDD	4.9-5.5V
4	RXD	TTL@3.3V	4	PWM(L)*	5V(Low-level effective)
5	TXD	TTL@3.3V	5	RXD	TTL@3.3V
6	Reserve	NC			
7	NC				
8	PWM(H)*	3.3V(High-level effective)			

Table 2.

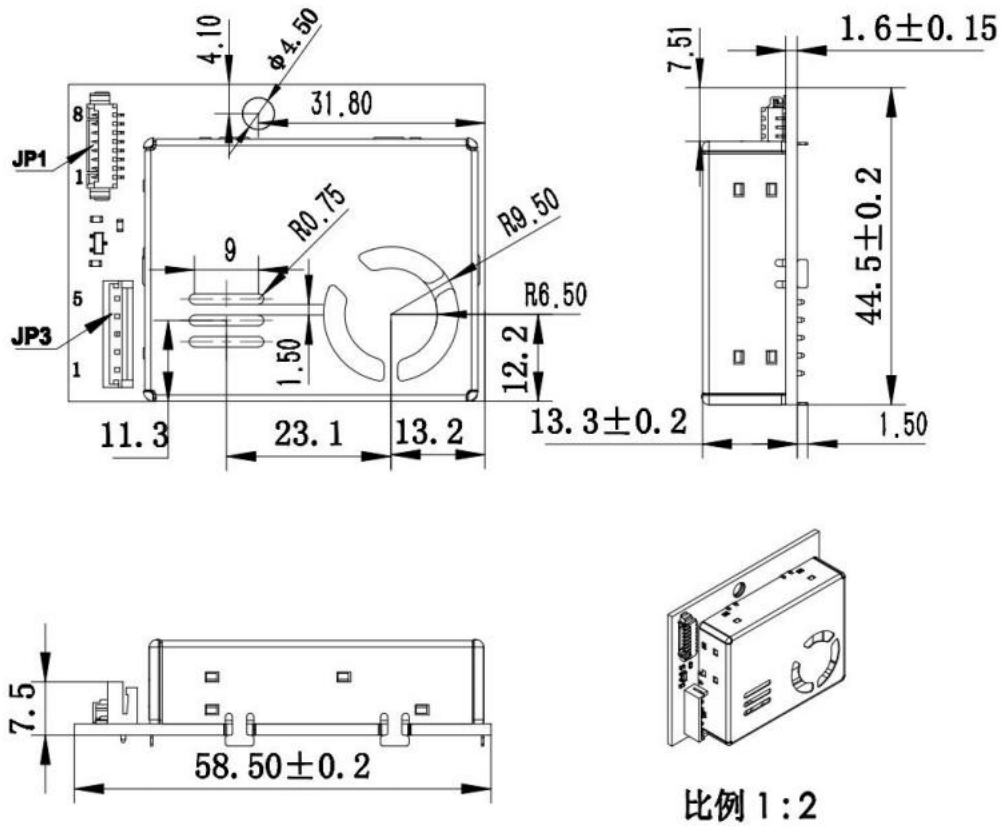
Sensor Construction:

Fig2. Sizes (Tolerance: ± 0.5 mm)

Installation Method:

The Sensor air inlets and outlets need to keep in good contact with external air. When the sensor is installed and working, must avoid strong airflow interference around the sensor; if it cannot be avoided, try to keep the external airflow direction perpendicular to the the inlet or outlet.

