



# General Type Isolation-Film Pressure Sensor

(Model No. WPAK70)

**Manual Version: 1.0**

**Date: Apr-8-2021**

Zhengzhou Winsen Electronics Technology CO., LTD

---

## Statement

This manual's copyright belongs to Zhengzhou Winsen Electronics Technology Co., LTD. Without the written permission, any part of this manual shall not be copied, translated, stored in database or retrieval system, also can't spread through electronic, copying, record ways.

Thanks for purchasing our products. In order to have customers use it better and reduce the faults caused by misuse, please read the manual carefully and operate it correctly in accordance with the instructions. If users disobey the terms or remove, disassemble, change the components inside of the sensor, we shall not be responsible for the loss.

The specific such as color, appearance, sizes &etc., please in kind prevail.

We are devoting ourselves to products development and technical innovation, so we reserve the right to improve the products without notice. Please confirm it is the valid version before using this manual. At the same time, users' comments on optimized using way are welcome.

Please keep the manual properly, in case you need help during the usage in the future.

**Zhengzhou Winsen Electronics Technology CO., LTD.**

---

## WPAK70 General Type Isolation-Film Pressure Sensor

### Product Description


WPAK70 is clamp type pressure sensor with one-stage silicon oil filling technology. Pressure to the diaphragm is transmitted to the pressure chip through silicon oil, and the compensation circuit corrects the pressure signal to a linear electrical signal. The exposed stressed diaphragm on the end face of the clamp directly feels the pressure, which can prevent scaling, unsanitary, viscous pressure blockage and other problems. It is widely used in food, medicine, wine and other hygienic industries and in occasions where the measuring medium may scale.



Picture 1: Sensor

### Equivalent circuit diagram

Four wire (Compensation)

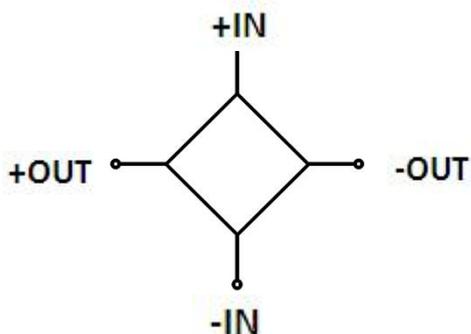

## Technical parameters

<b>Detection range</b>	-100kPa~0~10kPa...10MPa	
<b>Pressure Reference</b>	Gauge Pressure/Absolute Pressure/Sealed Gauge Pressure	
<b>Power supply</b>	1.5mA	Can be customized
<b>input resistance</b>	Constant current: 2kΩ~5KΩ; Constant Voltage : 3kΩ~18kΩ	
<b>Electrical Connection</b>	Pin or Wiring	
<b>Compensation Temperature</b>	0℃~60℃、-10℃~70℃	≤35kPa: 0℃~60℃, >35kPa: -10℃~ 70℃
<b>Working Temperature</b>	-40℃~120℃	
<b>Storage Temperature</b>	-40℃~125℃	
<b>Insulation resistance</b>	≥200MΩ/250VDC	
<b>Response Time</b>	≤1ms	Up to 90%FS
<b>Measuring Medium</b>	Liquid and Gas	
<b>Mechanical vibration</b>	20g (20~5000HZ)	
<b>Shock Resistance</b>	100g (10ms)	
<b>Lifespan</b>	10×10 <sup>6</sup> (Pressure Cycle)	


Structural Performance Index	
Diaphragm material	316L
Housing Material	316L
Infused Liquid	Silicone oil
Oil	MCT(Medium chain triglycerides)

Basic Parameter Index						
Item	Condition	Min	Special	Max	Unit	Remarks
Non-linear		-0.3	±0.25	0.3	%FS	Note(1)
Hysteresis		-0.05	±0.03	0.05	%FS	
Repeatability		-0.05	±0.03	0.05	%FS	
Zero Point Output		-2	±1	2	mV	
Full-Range Output	1.5mA ,10kPa	20			mV	
	1.5mA,other range	50	90	150		
Zero Point Temperature Drift	10kPa	-2	±1.5	2	%FS	Note(2)
	Other Detection Range	-1.5	±0.75	1.5		
Sensitivity Drift		-1.5	±0.75	1.5	%FS	Note(2)
Heat Hysteresis		-0.075	±0.05	0.075	%FS	Note(3)
Stability		-0.3	±0.2	0.3	%FS/Year	

**Notes:**

- (1) Based on BFSL least square method.
- (2) In temperature r compensation ange,0°C ~ 60 and -10°C ~ 70°C is refer to 30°C;-20°C ~ 85°C is refer to 32.5°C.
- (3) After high and low temperature, return to the reference temperature.

**Dimension& Electrical Connection**

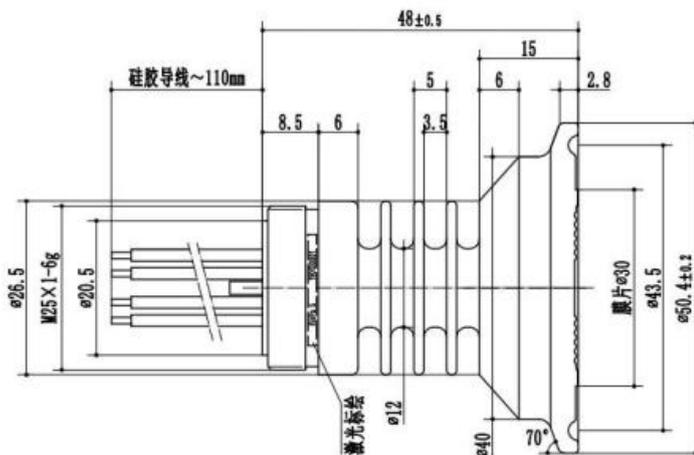

## Detection Ranges

Detection Range					
Range Code	Pressure Type	Detection Range	Overload Pressure	Burst pressure	O-ring
10k	G	0~10kPa	300% FS	600% FS	NBR
20k	G	0~20kPa	300% FS	600% FS	NBR
35k	G、A	0~35kPa	300% FS	600% FS	NBR
70k	G	0~70kPa	300% FS	600% FS	NBR
100k	G、A	0~100kPa	200% FS	500% FS	NBR
160k	G、A	0~160kPa	200% FS	500% FS	NBR
250k	G、A	0~250kPa	200% FS	500% FS	NBR
500k	G、A	0~500kPa	200% FS	500% FS	NBR
1M	G、A、S	0~1MPa	200% FS	500% FS	NBR
1.6M	G、A、S	0~1.6MPa	200% FS	500% FS	NBR
2.5M	G、A、S	0~2.5MPa	200% FS	500% FS	NBR
4M	S	0~4MPa	200% FS	400% FS	NBR
6M	S	0~6MPa	200% FS	400% FS	FKM
10M	S	0~10MPa	200% FS	400% FS	FKM

## Cautions

- The detection range should be within  $\pm 30\%$  FS for over range or down range application,.
- The pressure types includes gauge pressure, absolute pressure and sealing pressure.
- Please confirm the system's max overload. The maximum overload of the system should be less than the overload protection limit of the sensor, otherwise it may reduce the lifespan or bring damage to the core .
- Do not touch the diaphragm with any hard objects, it may break the diaphragm.
- The material and manufacturing process of the negative pressure core are different from the positive pressure core, the gauge pressure core cannot be used to replace the negative pressure core.
- Please carefully read the manual before installation, to avoid damage to the product caused by wrong installation.
- Incorrect may cause danger and personal injury.
- When pulling out the core from the shell, do not pull the wire and pin.