

Plastic Package Pressure Sensor (P/N: WPAS02)

Manual

Version: 1.1
Date: 2021-05-11

Statement

This manual's copyright belongs to Zhengzhou Winsen Electronics Technology Co., LTD. Without the written permission, any part of this manual shall not be copied, translated, stored in database or retrieval system, also can't spread through electronic, copying, record ways.

Thanks for purchasing our products. In order to have customers use it better and reduce the faults caused by misuse, please read the manual carefully and operate it correctly in accordance with the instructions. If users disobey the terms or remove, disassemble, change the components inside of the sensor, we shall not be responsible for the loss.

The specific such as color, appearance, sizes &etc., please in kind prevail.

We are devoting ourselves to products development and technical innovation, so we reserve the right to improve the products without notice. Please confirm it is the valid version before using this manual. At the same time, users' comments on optimized using way are welcome.

Please keep the manual properly, in case you need help during the usage in the future.

Zhengzhou Winsen Electronics Technology CO., LTD.

WPAS02 Plastic Package Pressure Sensor

Description

WPAS02 is a plastic package pressure sensor packaged using high-precision MEMS pressure sensitive chips and mature production processes. The standard pin structure is convenient for customers to use, while providing low-cost plastic sealed pressure sensor solutions for OEM customers. The WPAS02 series plastic sealed pressure sensors are only suitable for dry and non corrosive gases. Different ranges and output methods can be customized according to customer requirements.



Fig 1


Characteristic

- Package: SOP6
- Wide Pressure Range: $-20^{\circ} \sim 80^{\circ}$
- Suitable for module assembly
- High Accuracy: $\pm 0.3\%FS$
- Low Cost
- High Reliability

Application

- Process control system
- Pressure calibration instrument
- Medical instruments
- Environment Monitoring
- Consumer Product
- Sport Product
- Sphygmomanometer

Equivalent Circuit

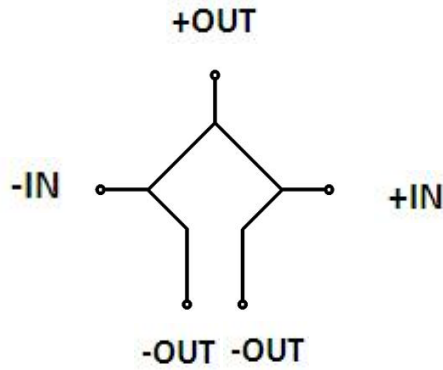

Technical Datasheet

Detection range	10kPa~100kPa	
Pressure Type	Gauge Pressure	
Excitation	5V	
Impedance	4kΩ~6KΩ	
Electronic Connection	PINS	
Working Temperature	-20℃~80℃	
Storage Temperature	-55℃~150℃	
Response Time	≤1ms	Up to 90%FS
Detection Medium	Dry and non corrosive gas	
Mechanical Vibration	20g (20~5000HZ)	
Impact	100g (10ms)	
Lifespan	10×10 ⁶ (Pressure Cycle)	

Detection Range

Range	Pressure Type	Overload Pressure	Burst Pressure
10k	A	200% FS	400% FS
20k	A	200% FS	400% FS
40k	A	200% FS	400% FS
100k	A	200% FS	400% FS

Parameters						
Item	Condition	Miniest	Typical	Max	Unit	Note
Non-linear		-0.5	-	0.5	%FS	Note (1)
Hysteresis		-0.05	±0.03	0.05	%FS	
Repeatability		-0.08	±0.03	0.08	%FS	
Zero Point Output		-40	-	+40	mV	
Full-Range Output Coefficient		60	100	150	mV	Note (2)
Zero Temperature Coefficient		-0.15	-	0.15	%FS/°C	
Full range temperature Coefficient		-0.06	-	-0.06	%FS°C	
Heat Hysteresis		-0.075	±0.05	0.075	%FS	Note (3)
Stability		-0.3	±0.2	0.3	%FS/Year	


Notes:

(1)Based on BFSL least square method.

(2)Full range output of products with customized detection range is not include .

(3)After high and low temperature, return to the reference temperature.

Structure & Dimension

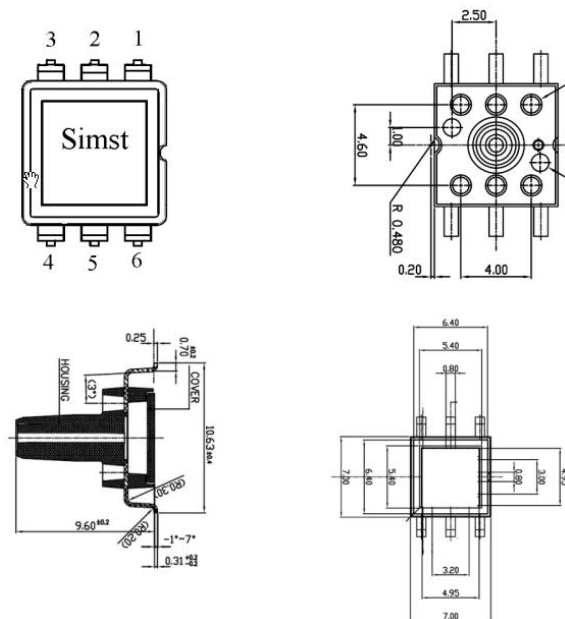

Electrical Connection



1、 6	-OUT
2	+IN
3	+S
4	Empty
5	-IN

Cautions

- The detection range should be within $\pm 30\%$ FS for over range or down range application,.
- Please confirm the system's max overload. The maximum overload of the system should be less than the overload protection limit of the sensor, otherwise it may reduce the lifespan or bring damage to the core .
- The material and manufacturing process of the negative pressure core are different from the positive pressure core, the gauge pressure core cannot be used to replace the negative pressure core.
- Please carefully read the manual before installation, to avoid damage to the product caused by wrong installation.
- Incorrect may cause danger and personal injury.