



General Type Isolation-Film Pressure Sensor

(Model No. WPAK67)

Manual Version: 1.0

Date: Jun-8-2021

Zhengzhou Winsen Electronics Technology CO., LTD

Statement

This manual's copyright belongs to Zhengzhou Winsen Electronics Technology Co., LTD. Without the written permission, any part of this manual shall not be copied, translated, stored in database or retrieval system, also can't spread through electronic, copying, record ways.

Thanks for purchasing our products. In order to have customers use it better and reduce the faults caused by misuse, please read the manual carefully and operate it correctly in accordance with the instructions. If users disobey the terms or remove, disassemble, change the components inside of the sensor, we shall not be responsible for the loss.

The specific such as color, appearance, sizes &etc., please in kind prevail.

We are devoting ourselves to products development and technical innovation, so we reserve the right to improve the products without notice. Please confirm it is the valid version before using this manual. At the same time, users' comments on optimized using way are welcome.

Please keep the manual properly, in case you need help during the usage in the future.

Zhengzhou Winsen Electronics Technology CO., LTD.

WPAK67 General Type Isolation-Film Pressure Sensor

Product Description

WPAK67 series is a pressure core encapsulated by high precision imported diffused silicon pressure sensitive chip and mature manufacturing technology. It is the core component for manufacturing pressure sensor and pressure transmitter. As a high performance pressure sensitive element, it can be easily amplified signal and integrated to a transmitter with standard signal output.

WINSEN Elec can undertake special customization according to the needs of users, such as full welded structure, wide temperature compensation, customized shape, high reliability, strong impact and vibration resistance pressure sensors, to provide reliable solutions for a variety of applications.

Main features:

- All stainless steel 316L package, anti-erosion
- wide temperature compensation-10~+70°C
- Constant current and constant voltage excitation are optional
- Normalized output available
- Glue-filled and moisture-proof circuit board

Application:


- process control system
- Pressure calibration instrument
- Hydraulic system
- Biomedical instruments
- Hydraulic system and valve
- Liquid level measurement
- Military equipment
- Refrigeration equipment and HAVC system
- Ships and navigation
- Aircraft and Avionics Systems



Picture 1: Sensor

Equivalent circuit diagram

Four wire (Compensated)

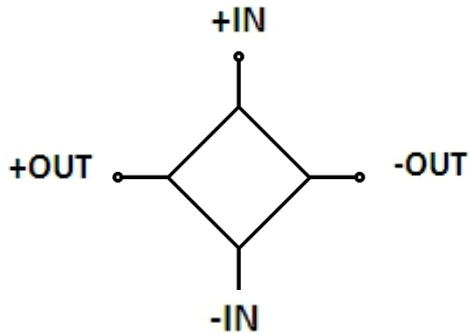

Technical parameters

Detection range	0~10kPa...2.5MPa	
Pressure Type	Differential Pressure	
Power supply	1.5mA	
input resistance	Constant current: 2kΩ~5kΩ; Constant Voltage : 3kΩ~18kΩ	
Electrical Connection	Pin or Wiring	
Compensation Temperature	0°C~60°C、-10°C~70°C	≤35kPa: 0°C~60°C, >35kPa: -10°C~70°C
Working Temperature	-40°C~120°C	
Storage Temperature	-40°C~125°C	
Insulation resistance	≥200MΩ/250VDC	
Response Time	≤1ms	Up to 90%FS
Measuring Medium	Liquid and Gas	
Mechanical vibration	20g (20~5000HZ)	
Shock Resistance	100g (10ms)	
Lifespan	10×10 ⁶ (Pressure Cycle)	


Structural Performance Index	
Diaphragm material	316L
Housing Material	316L
Infused Liquid	Silicone oil
Seal Ring	NBR

Basic Parameter Index						
Item	Condition	Min	Special	Max	Unit	Remarks
Non-linear		-0.3	±0.25	0.3	%FS	Note(1)
Hysteresis		-0.05	±0.03	0.05	%FS	
Repeatability		-0.05	±0.03	0.05	%FS	
Zero Point Output		-2	±1	2	mV	
Full-Range Output	1.5mA ,	50	90	150	mV	
	10kPa	-2	±1.5	2		
	other range	-1.5	±0.75	1.5		
Sensitivity Drift		-1.5	±0.75	1.5	%FS	Note(2)
Heat Hysteresis		-0.075	±0.05	0.075	%FS	Note(3)
Stability		-0.3	±0.2	0.3	%FS/Year	

Notes:

- (1) Based on BFSL least square method.
- (2) In temperature r compensation ange,-10°C ~70°C is refer to 30°C;
- (3) After high and low temperature, return to the reference temperature.

Dimension

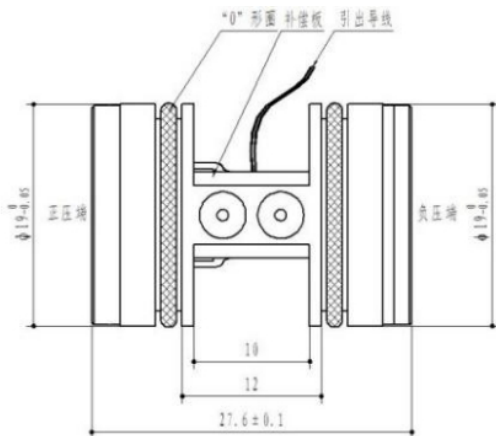

Detection Ranges

Detection Range					
Range Code	Pressure Type	Detection Range	Overload Pressure	Burst pressure	O-ring
10k	D	0~10kPa	300%FS	600%FS	NBR
20k	D	0~20kPa	300%FS	600%FS	NBR
35k	D	0~35kPa	300%FS	600%FS	NBR
70k	D	0~70kPa	300%FS	600%FS	NBR
100k	D	0~100kPa	200%FS	500%FS	NBR
160k	D	0~160kPa	200%FS	500%FS	NBR
250k	D	0~250kPa	200%FS	500%FS	NBR
500k	D	0~500kPa	200%FS	500%FS	NBR
1M	D	0~1MPa	200%FS	500%FS	NBR
1.6M	D	0~1.6MPa	200%FS	500%FS	NBR
2.5M	D	0~2.5MPa	200%FS	500%FS	NBR

Cautions

- The detection range should be within $\pm 30\%$ FS for over range or down range application,.
- The pressure types includes gauge pressure, absolute pressure and sealing pressure.
- Please confirm the system's max overload. The maximum overload of the system should be less than the overload protection limit of the sensor, otherwise it may reduce the lifespan or bring damage to the core .
- Do not touch the diaphragm with any hard objects, it may break the diaphragm.
- One end of the sensing element is the high voltage end and the other end is the low voltage end. It can be identified by the "+" or "-" marks on the ends, or by testing.
- The material and manufacturing process of the negative pressure core are different from the positive pressure core, the gauge pressure core cannot be used to replace the negative pressure core.
- Please carefully read the manual before installation, to avoid damage to the product caused by wrong installation.
- Incorrect may cause danger and personal injury.
- When pulling out the core from the shell, do not pull the wire and pin.
- Anti static measures is necessary during assembly or testing.